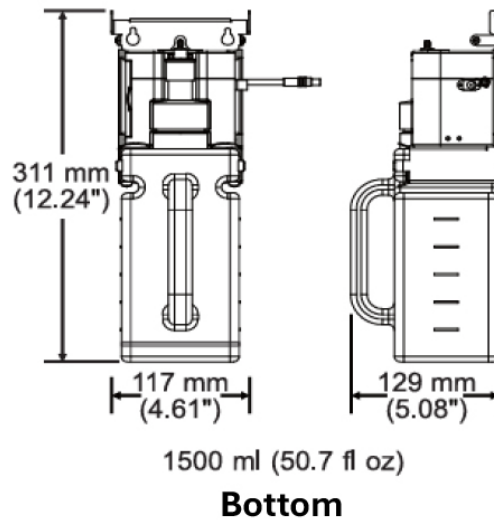
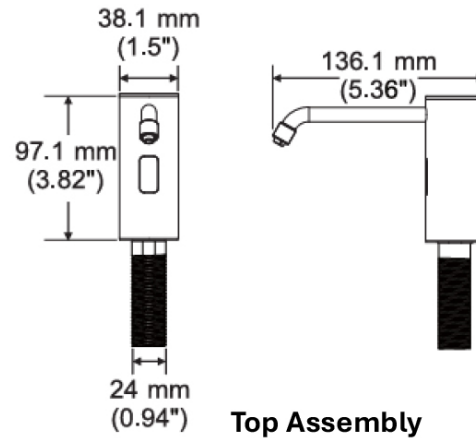


COUNTER - TOP AUTOMATIC LIQUID SOAP DISPENSER

B-8278.91

(For Sale in India Only)

**MATERIALS:**

Spout Assembly — Above the counter, bright polished 304 stainless steel vandal-resistant spout with integral stem. Spout and Stem Assembly includes a sensor wire that connects to the electronic control box, soap tube that connects to the pump. Integrated to the spout are a dispense tip and activation sensor housing.

Soap Reservoir Tank — Polypropylene plastic. Capacity: 50.7 fl oz (1.5 L).

Pump and Soap Delivery System — Soap Reservoir Tank has a pump and electronic control box that pumps the soap through the soap tube to spout.

6V AC Adapter — Powered by 6V AC Adapter that is included. (Optional Battery Pack available. Battery Pack uses 4 "D" cell batteries (not included)).

continued . . .

OPERATION:

To fill the dispenser, pull the container out from the base plate(beneath the counter) and remove the pump assembly, then pour the liquid soap directly into the container. To activate the dispenser, place hand below spout in front of the IR sensor. Green LED will light up briefly when dispensing. Unit dispenses 1 to 1.5 ml of liquid soap per dispense. Dispenses liquid soap with a viscosity of 1 cP to 3,000 cP (centipoise).

INSTALLATION:

Unit is designed for installation into counters up to 2" (50 mm) maximum thickness with 1" (25 mm) diameter mounting hole, and compatible with sink rims up to 25/64" (10 mm) wide and 51/64" (20 mm) tall. Recommended spout location is minimum of 1-19/32" (40 mm) and maximum of 2-45/64" (70 mm) from inside edge of the sink rim to the centre of the mounting hole, and minimum clearance of 1-49/64" (45 mm) from the centre of mounting hole to the back of the wall. Below the counter, install the soap tank and pump assembly at the rear wall with the included screws and wall anchors, keeping a minimum of 400 mm and maximum of 250 mm vertical clearance from the bottom of the countertop to the mounting screw location. Provide backing in wall as specified in accordance with local building codes. Plug AC Adapter into wall and end of plug into power port on the pump assembly.

SPECIFICATION:

Counter-Mounted, Automatic, Liquid Soap Dispensers shall dispense commercially marketed all-purpose bulk hand soaps. Spout assembly shall be satin finished 304 stainless steel spout with integral stem to accommodate up to 2" (50 mm) thick counter tops. Unit is equipped with IR Sensor that activates to dispense soap when hand is placed in the sensor activation zone. Unit is powered by and comes with 6V AC Adapter. Optional Battery Pack available. Battery Pack uses 4 "D" cell batteries (not included).

Counter-Mounted Sensor-Operated Liquid Soap Dispenser shall be Model B-8278.91 of Bobrick Washroom Equipment India Private Limited, India.