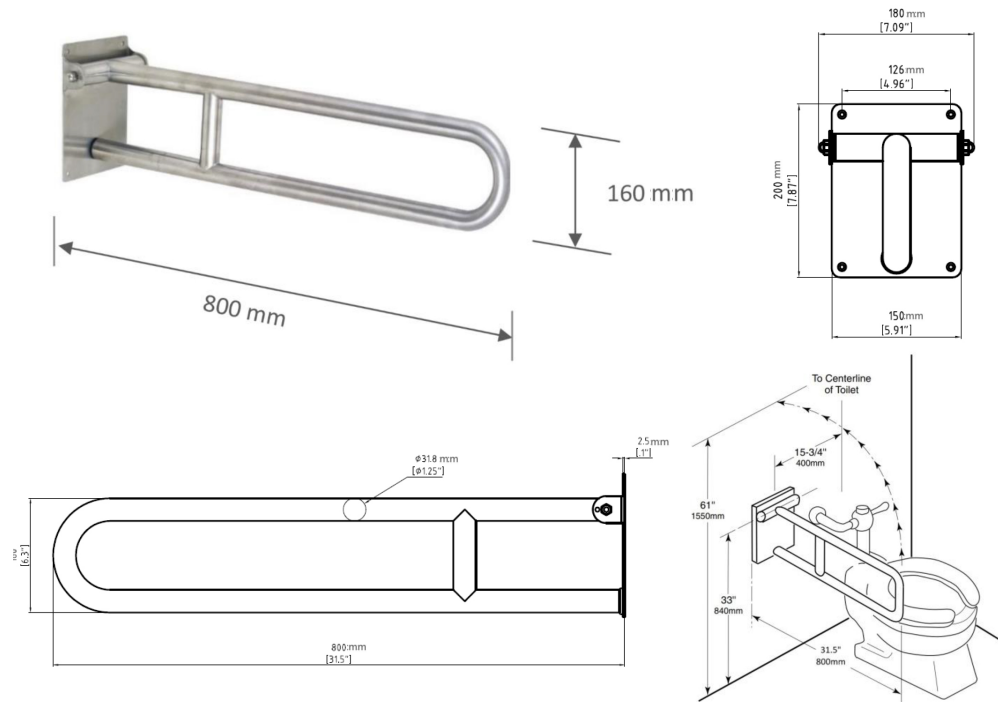


BOBRICK**Technical Data**

SWING - UP GRAB BAR

B-125.91

(For Sale in India Only)

**MATERIALS:**

Grab Bar — 18-8, Type-304, 18-gauge (1.2mm) stainless steel tubing with satin-finish. 1-1/4" (32mm) outside diameter.

Backplate — 18-8, Type-304, 0.1" (2.5mm) thick, satin-finish stainless steel with four screw holes for attachment to wall.

OPERATION:

Swing-up grab bar is manually raised for approach or departure and lowered to horizontal position for support.

STRENGTH

Swing-up grab bar can support loads in excess of 386 pounds (175kg) if properly installed.

Safety Warning: Grab bars are no stronger than the anchors and walls to which they are attached and, therefore, must be firmly secured in order to support the loads for which they are intended. To avoid potential injury, the building owner or maintenance personnel should remove the grab bar from service if the grab bar is not adequately secured to wall or if there is any observe damage to the stud.

INSTALLATION:

Provide concealed anchor device or backing as specified or required in accordance with local building codes before wall is finished. Fasten grab bar to anchor device or backing. Mounting screws are included.

SPECIFICATION:

Grab bar shall be Type-304 stainless steel with satin finish. Grab bar shall have 18-gauge (1.2mm) wall thickness and 1-1/4" (32mm) outside diameter. Backplate shall be 0.1" (2.5mm) thick stainless steel, equipped with screw holes for attachment to wall. Swing-up grab bar shall be manually raised for approach or departure and lowered to horizontal position for support.

Swing-Up Grab Bar shall be Model B-125.91 of Bobrick Washroom Equipment India Private Limited, India.